

Overview of transmission systems

Dr. Les Sabel

S-Comm Technologies and WorldDAB

Technical Committee



WorldDAB and ASBU DAB+ technical webinar series




DAB+ System Structure


1. Transmission system overview
2. Monitoring Systems

Overview

Main system blocks

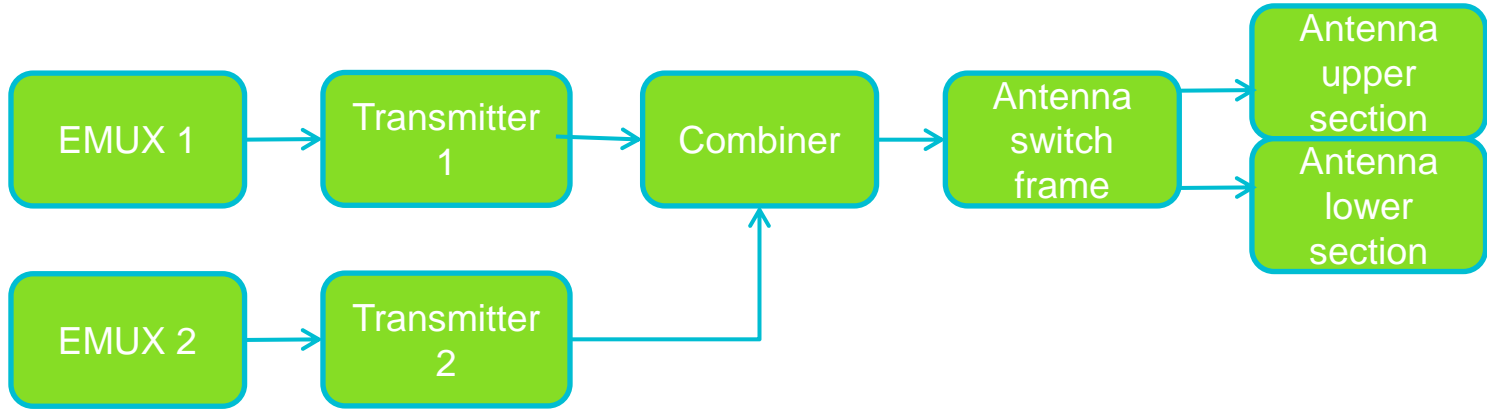

Example

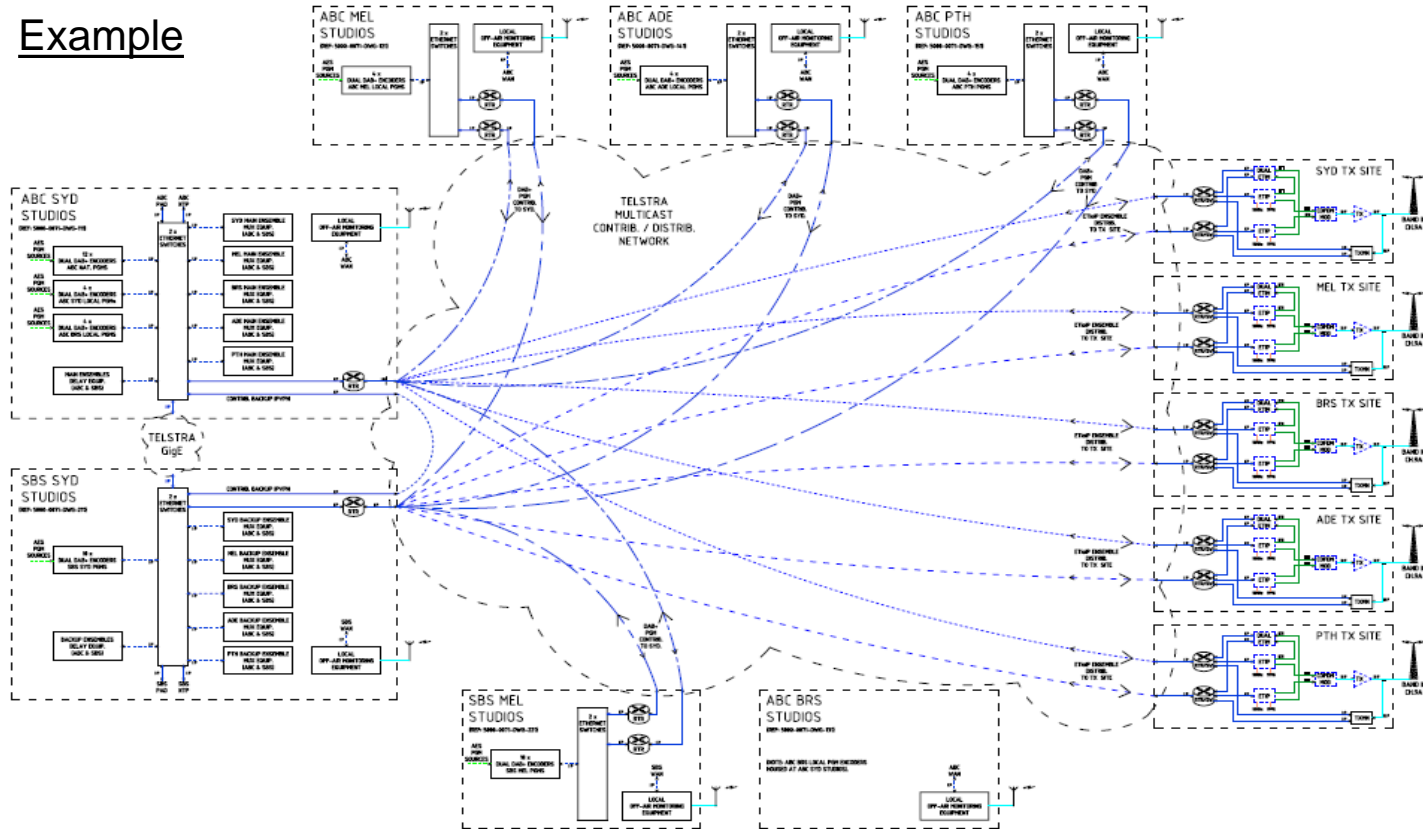

Modulation and coding

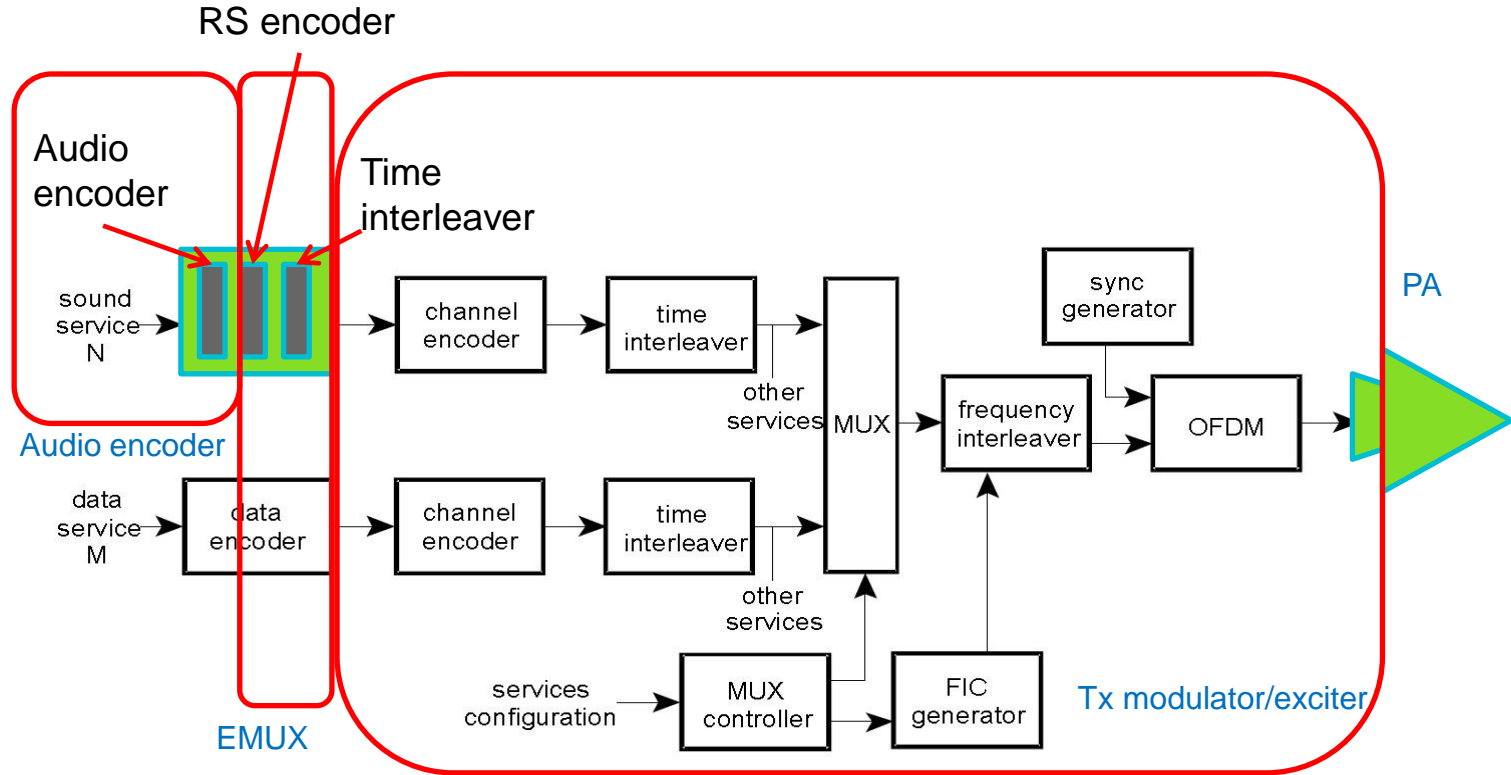


Figure 4.3.1: Conceptual block diagram of the EUREKA DAB system transmitter drive

Forward Error Correction

Forward Error Correction (FEC) codes are applied per sub-channel


Comparative performance

FEC Code	Code Rate	Capacity (kbps)	Number of 64kbps channels	Approximate power required relative to 3A
1A	1/4	576	9	-3 to -6dB
2A	3/8	864	13	-2 to -3dB
3A	1/2	1152	18	0
3B	2/3	1536	24	+3dB
4A	3/4	1728	27	+6dB

Payload capacity and transmit power can be traded
Stronger FEC protection = lower capacity OR lower power for the same coverage area

Signal flow

Antenna system

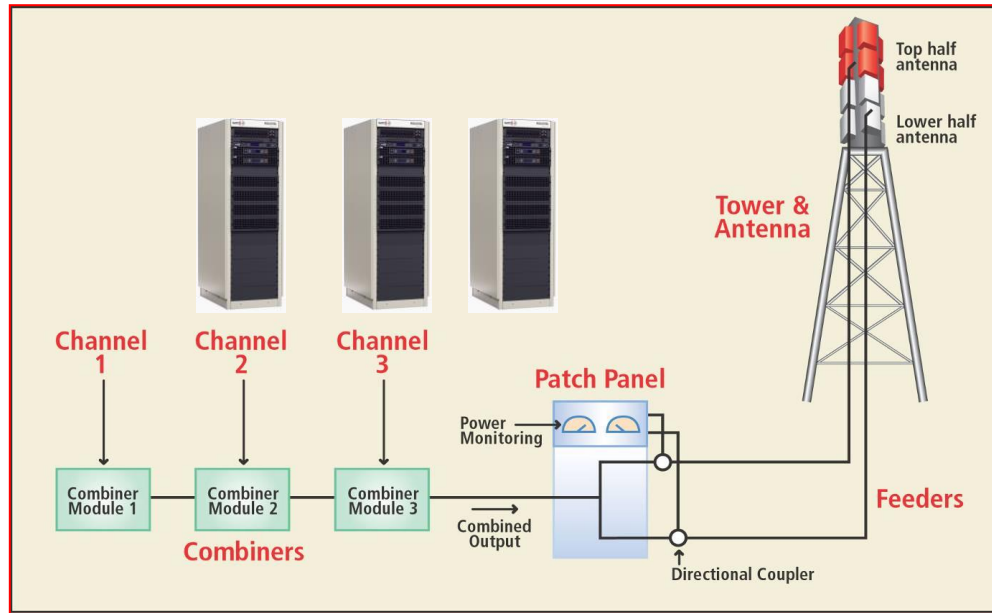

Example antenna switch frame / patch panel and combiner modules

DAB critical transmission mask

DAB spectrum mask

Signal bandwidth = 1536 carriers at 1kHz each => 1.535MHz

Channel bandwidth = 1.712 MHz

$$10 \log(1536 \text{ kHz} / 4 \text{ kHz}) = -25.84 \text{ dB}$$

The mask filter is designed to allow multiplexers to operate in immediately adjacent frequency blocks, e.g. 9A and 9B

Areas with adjacent channel usage require the critical mask

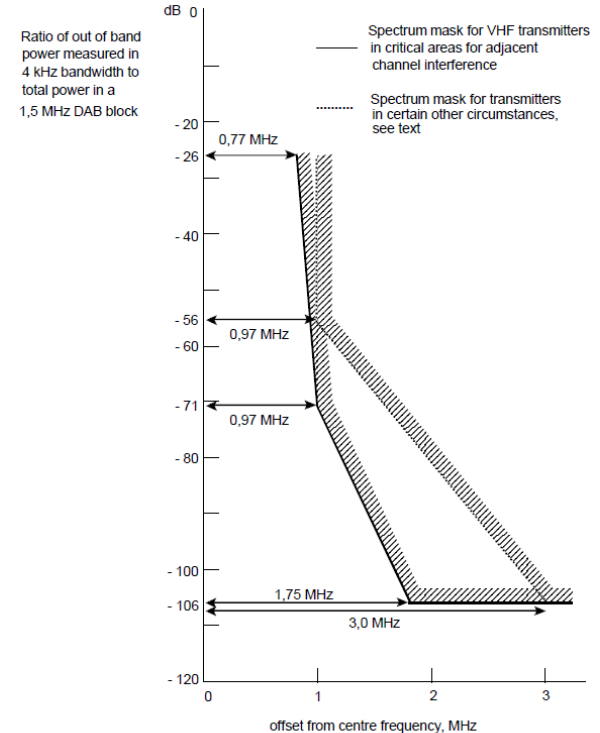


Figure 66: Out-of-band spectrum mask for DAB transmission signal (all transmission modes)

Simple single filter


Tx spectrum before and after the mask filter



Improved shoulder distance after filter


DAB critical transmission mask

Example output spectrum after the mask filter

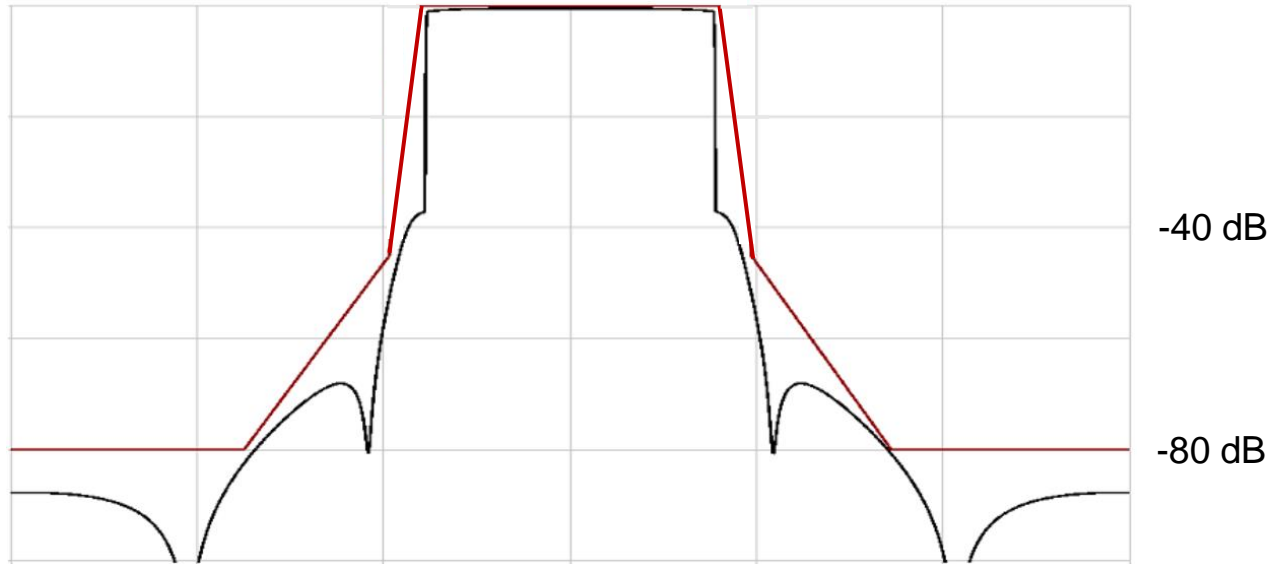

Combiners

Combiners allow multiple transmission signals to be 'combined' with low loss and suitable DAB mask filtering

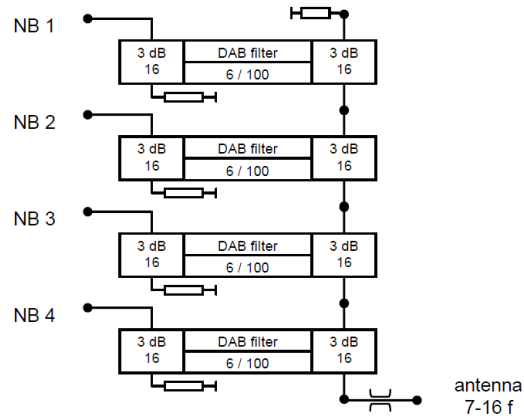

insertion loss in dB (tolerance $\pm 0,05$ dB)			return loss
$f_0 - 0,77$ MHz	f_0	$f_0 + 0,77$ MHz	
2,6	1,3	2,6	≥ 26 dB
2,3	1,0	2,3	≥ 26 dB
≥ 0			
$> 40 \pm 5$ dB			
	$f_0 \pm 0,97$ MHz	$f_0 \pm 1,75$ MHz	$f_0 \pm 3$ MHz
	≥ 15	≥ 45	≥ 53

Typical design



High Power High Tower - Antenna systems

Examples



Band III antenna
at Artarmon site in
Sydney

Transmission
tower at Mt
Wellington, Hobart
has a full raydome
due to extreme
weather conditions



Antenna systems




- DAB+ Signals are vertically polarised
- TV Signals are usually horizontally polarised
- Beam Tilt techniques can be employed in Vertical Radiation Pattern to allow higher ERP and more efficient Co-Channel reuse
- Photo of combined Band III TV & DAB+ antenna at Mount Lofty in Adelaide



RFS 662 dual polarisation VHF Band III antenna panel

Antenna patterns – high complexity

Brisbane EMAX vs. ERP

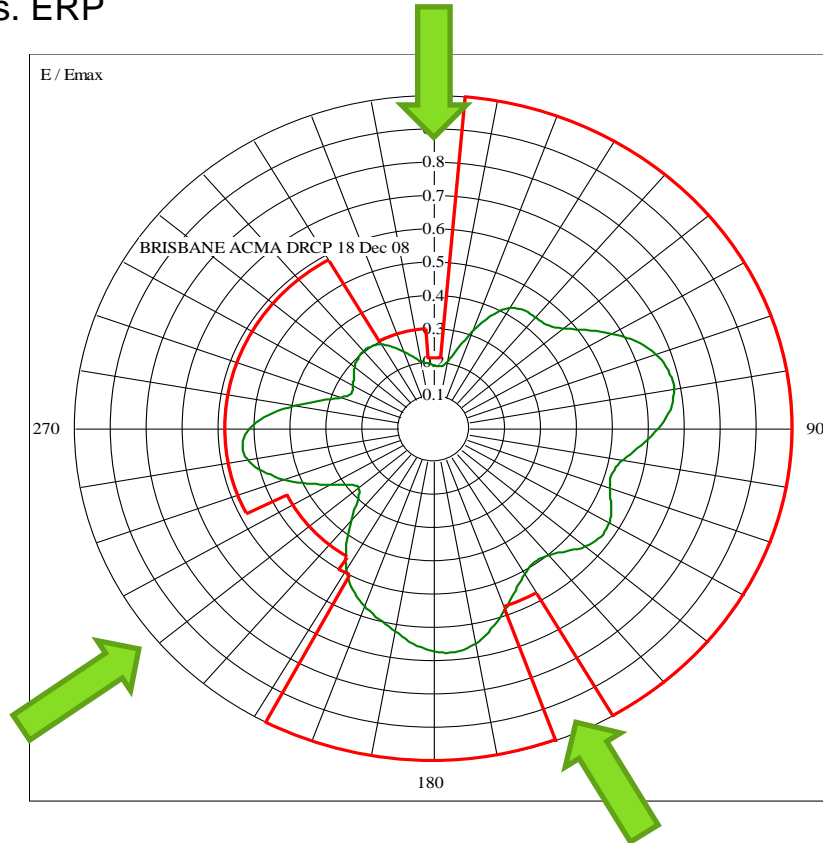

Variations to the DRCP – Engineering Report for Brisbane


6.2. Appendix 2 DAB Antenna Specification

Following are the antenna technical details for the proposed Brisbane DAB antenna system identified in this report as 'Ant-Spec-11Sep08'.

Transmission site: Service: DAB
Site ID: 12749
Site name: Channel 10 Site MOUNT COOT-THA

Antenna details: ERP: To be determined
Antenna height: 191.7 metres
Site height: 207 metres (DEM 9 arc-second)
Antenna specification: As follows:

Antenna VRP Specification: dated 10 Sep08

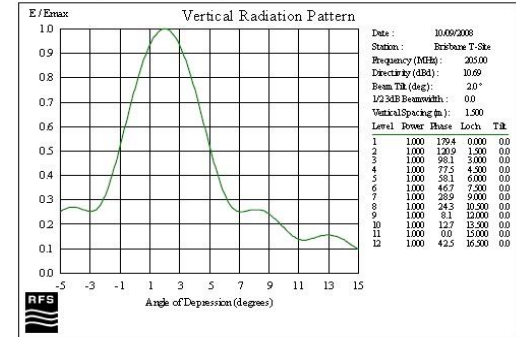


RF network and antenna design must consider interference and well as coverage

Lower Power transmissions

Medium power transmissions are used extensively in Europe and UK where most main sites are 5 – 10 kW. Repeater / infill sites can be from 100W to 5 kW depending on the coverage requirements and SFN compatibility.

These sites generally use dipole antennas as they are much cheaper and lighter.

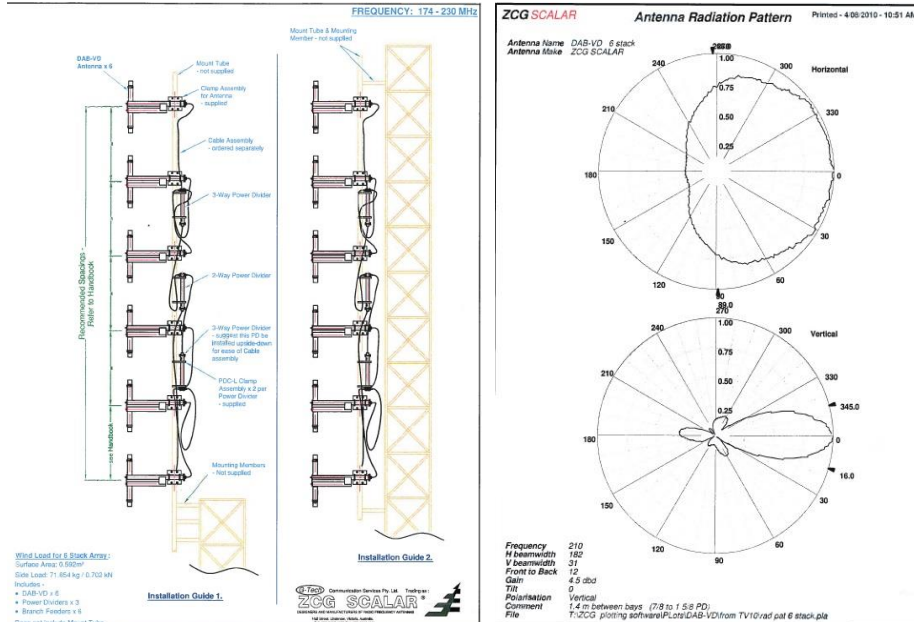

Yagi antenna example approx. 4.5 dBd gain




Monitoring systems

Overview

- Content delivery
- Control and monitoring


Control and monitoring

Monitoring equipment

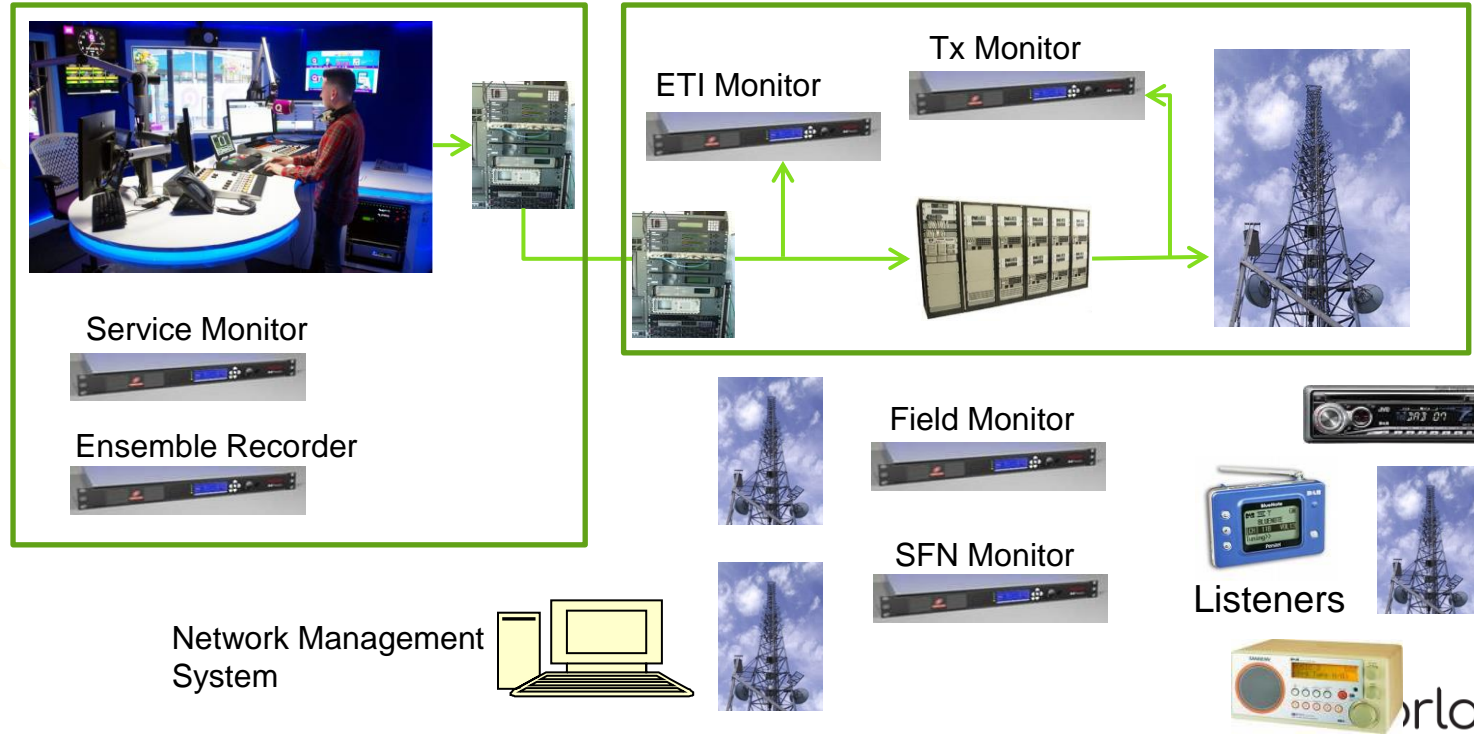

Control and monitoring

- Network Management Systems
 - Lots of options
 - SNMP basis
 - Physical relay systems reducing
- Equipment control and configuration
- Remote observation
- Remote maintenance
- Operational history and recording
 - Fault analysis
- MSTs for system access and control

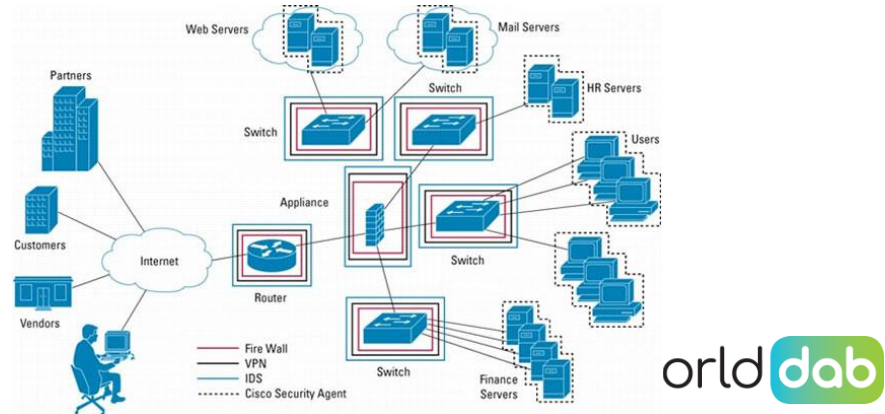


Control and monitoring

Network Management Systems

Icon based mimic diagrams can help NMC staff quickly identify issues

Systems should be designed to allow remote access via web interfaces to ensure rapid response times

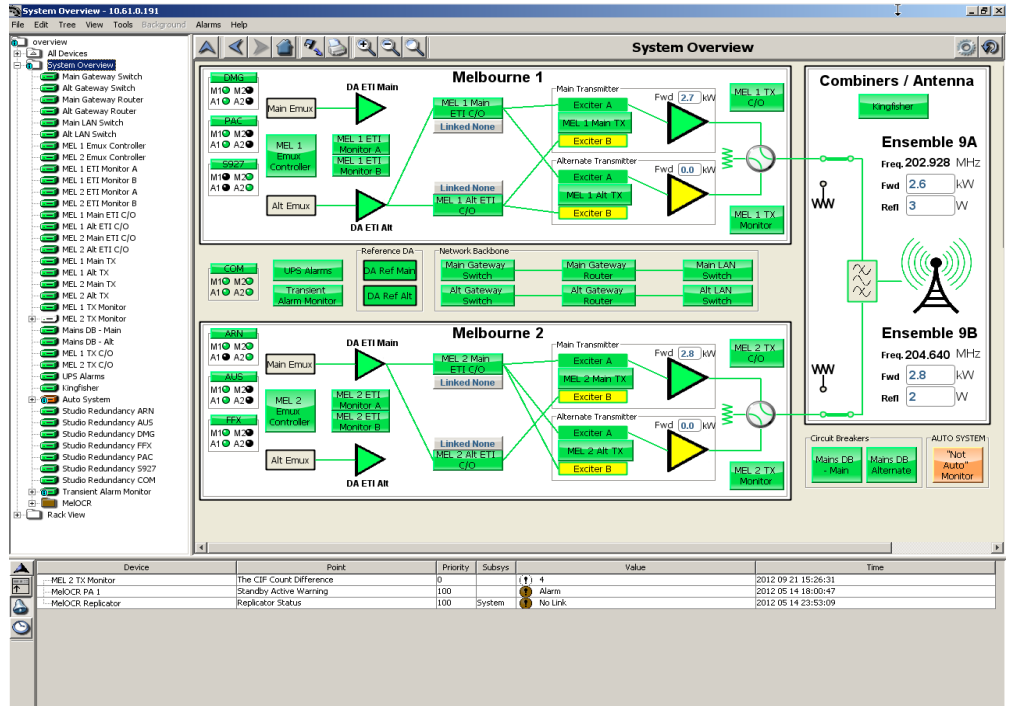

Summary

- Transmissions systems need to be engineered to meet the business demands for
 - Coverage and interference
 - Reliability
 - Performance and cost effectiveness
- Monitoring systems are essential to ensure appropriate system operation
 - Reliability
 - Fault detection and recovery
 - Ongoing operations and feature updates
 - Future proofing the business

Thank you

For further information, please contact:

www.worlddab.org

or

les.sabel@scommtech.com.au